


KASTEL wash

HK 1200 E PRS

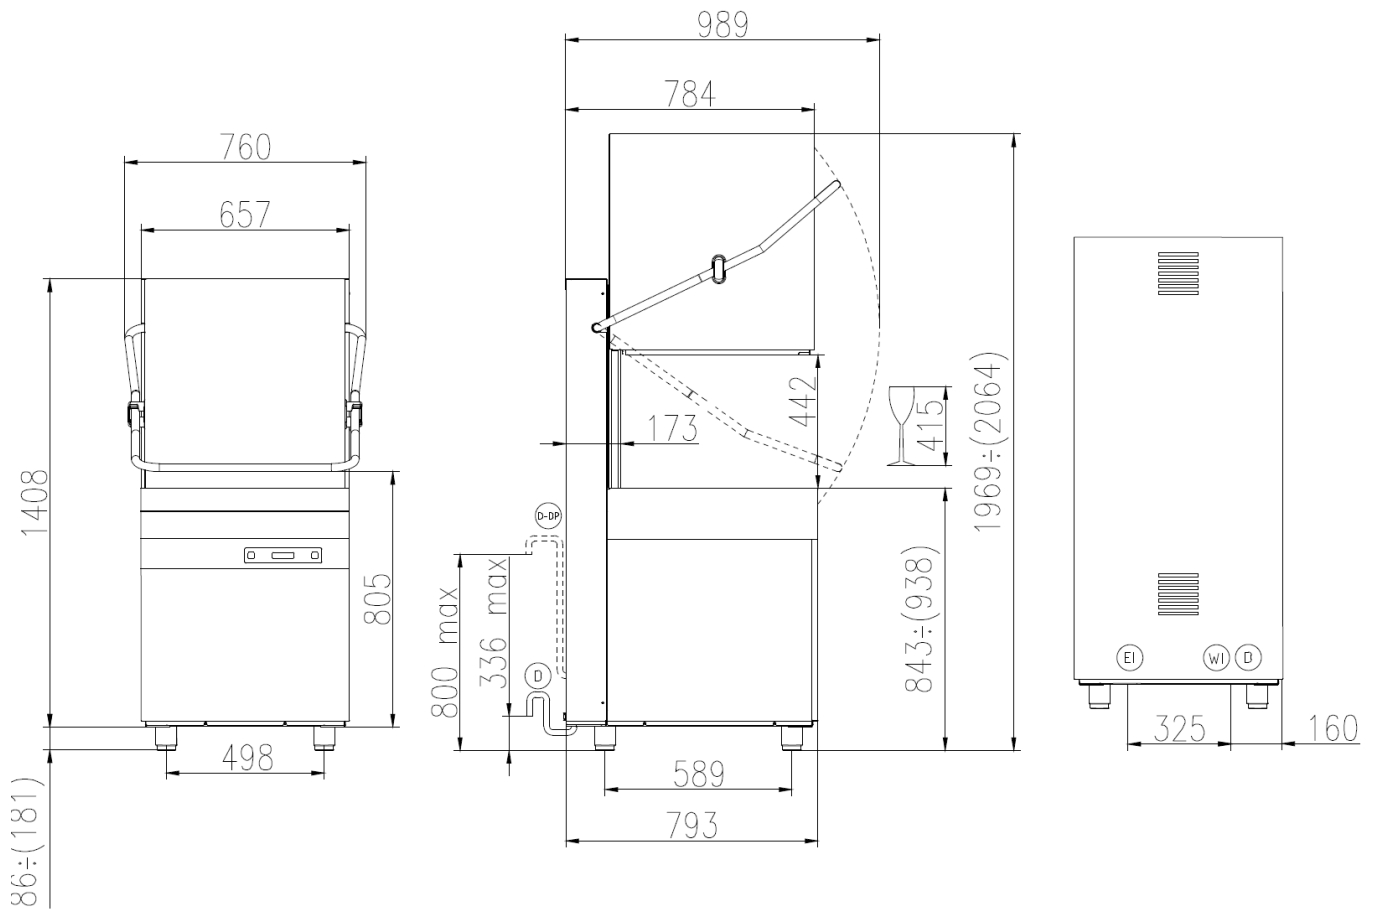

- EI
 CAVO DI ALIMENTAZIONE
 POWER CORD SUPPLY
 CABLE D'ALIMENTATION
 CABLE DE ALIMENTACION
- WI
 CANNA DI CARICO G 3/4" L=2000 mm
 G 3/4" INLET HOSE L=2000 mm
 TUYAU D'ALIMENTATION G 3/4" L=2000 mm
 TUBO DE ALIMENTACION G 3/4" L=2000 mm
- D
 TUBO DI SCARICO ø 40 mm L=2000 mm
 DRAIN HOSE ø 40 mm L=2000 mm
 TUYAU DE VIDANGE ø 40 mm L=2000 mm
 TUBO DE DESAGUE ø 40 mm L=2000 mm
- D-DP
 TUBO DI SCARICO ø 29 mm L=2500 mm (CON POMPA SCARICO)
 DRAIN HOSE ø 29 mm L=2500 mm (WITH DRAIN PUMP)
 TUYAU DE VIDANGE ø 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)
 TUBO DE DESAGUE ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)

	Min 10°C-MAX 50°C
	Min 10°C-MAX 25°C with ENERGY RECOVERY
	200-500kPa(2+5 Bar)
	100-500kPa(1+5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5+20f-2.8+11'd